

DYNNESS



Dyness Digital Energy Technology Co., LTD.

Tel : +86 400 666 0655


Web : [www.dyness.com](http://www.dyness.com)

E-mail : [sales@dyness-tech.com](mailto:sales@dyness-tech.com)

Address : No. 688 Liupu Road, GuoxiangStreet, Wuzhong Economic Development Zone, Suzhou

File version-20241230-EN Information might be subject to change without notice during product improving

DYNNESS

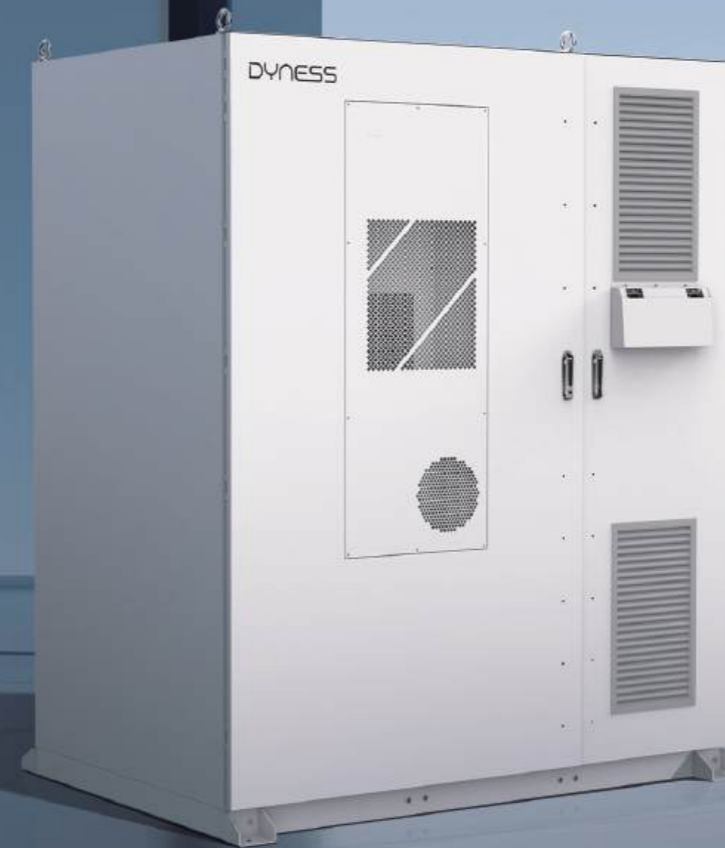

**Commercial and  
Industrial  
Energy Solutions**

Discover Your Nature

# About Dyness

---

Dyness, founded in 2017, is a global pioneering energy storage solutions innovator. Relying on advantageous technology and robust product R&D capabilities, Dyness has established a comprehensive product portfolio for full scenarios, including C&I and residential energy storage throughout the entire lifecycle. With its global headquarters in Suzhou, China, Dyness has provided safe, reliable, and high-quality products and services to over 500,000+ users in 100+ countries and regions.

At Dyness, customer satisfaction is always Dyness' top priority. Aligned with its mission to reduce the Earth's temperature, Dyness is collaborating with 90+ global brand partners to reduce the cost of renewable energy usage for users. As the pace of global energy transition accelerates, Dyness is committed to promoting sustainable development on a global scale through commercial deepening. It strives to work alongside the industry, market and society to build a low-carbon future worldwide.

- **Mission**

---

Driving digital energy development, reducing the cost of energy acquisition, and lowering Earth's temperature.

- **Vision**

---

Achieving customer priority, enabling the advancement of global sustainable pursuits, and striving to become a better version of oneself.

- **Values**

---

Be True | Be Pragmatic | Be Excellent | Be Altruistic




# Global Footprint

## The Global Pioneering Energy Storage Solutions Innovator

- EUPD Top Brand PV (Storage)
- China TOP 500 Hidden Unicorn
- iF Desigh Award 2024 Winner

.....

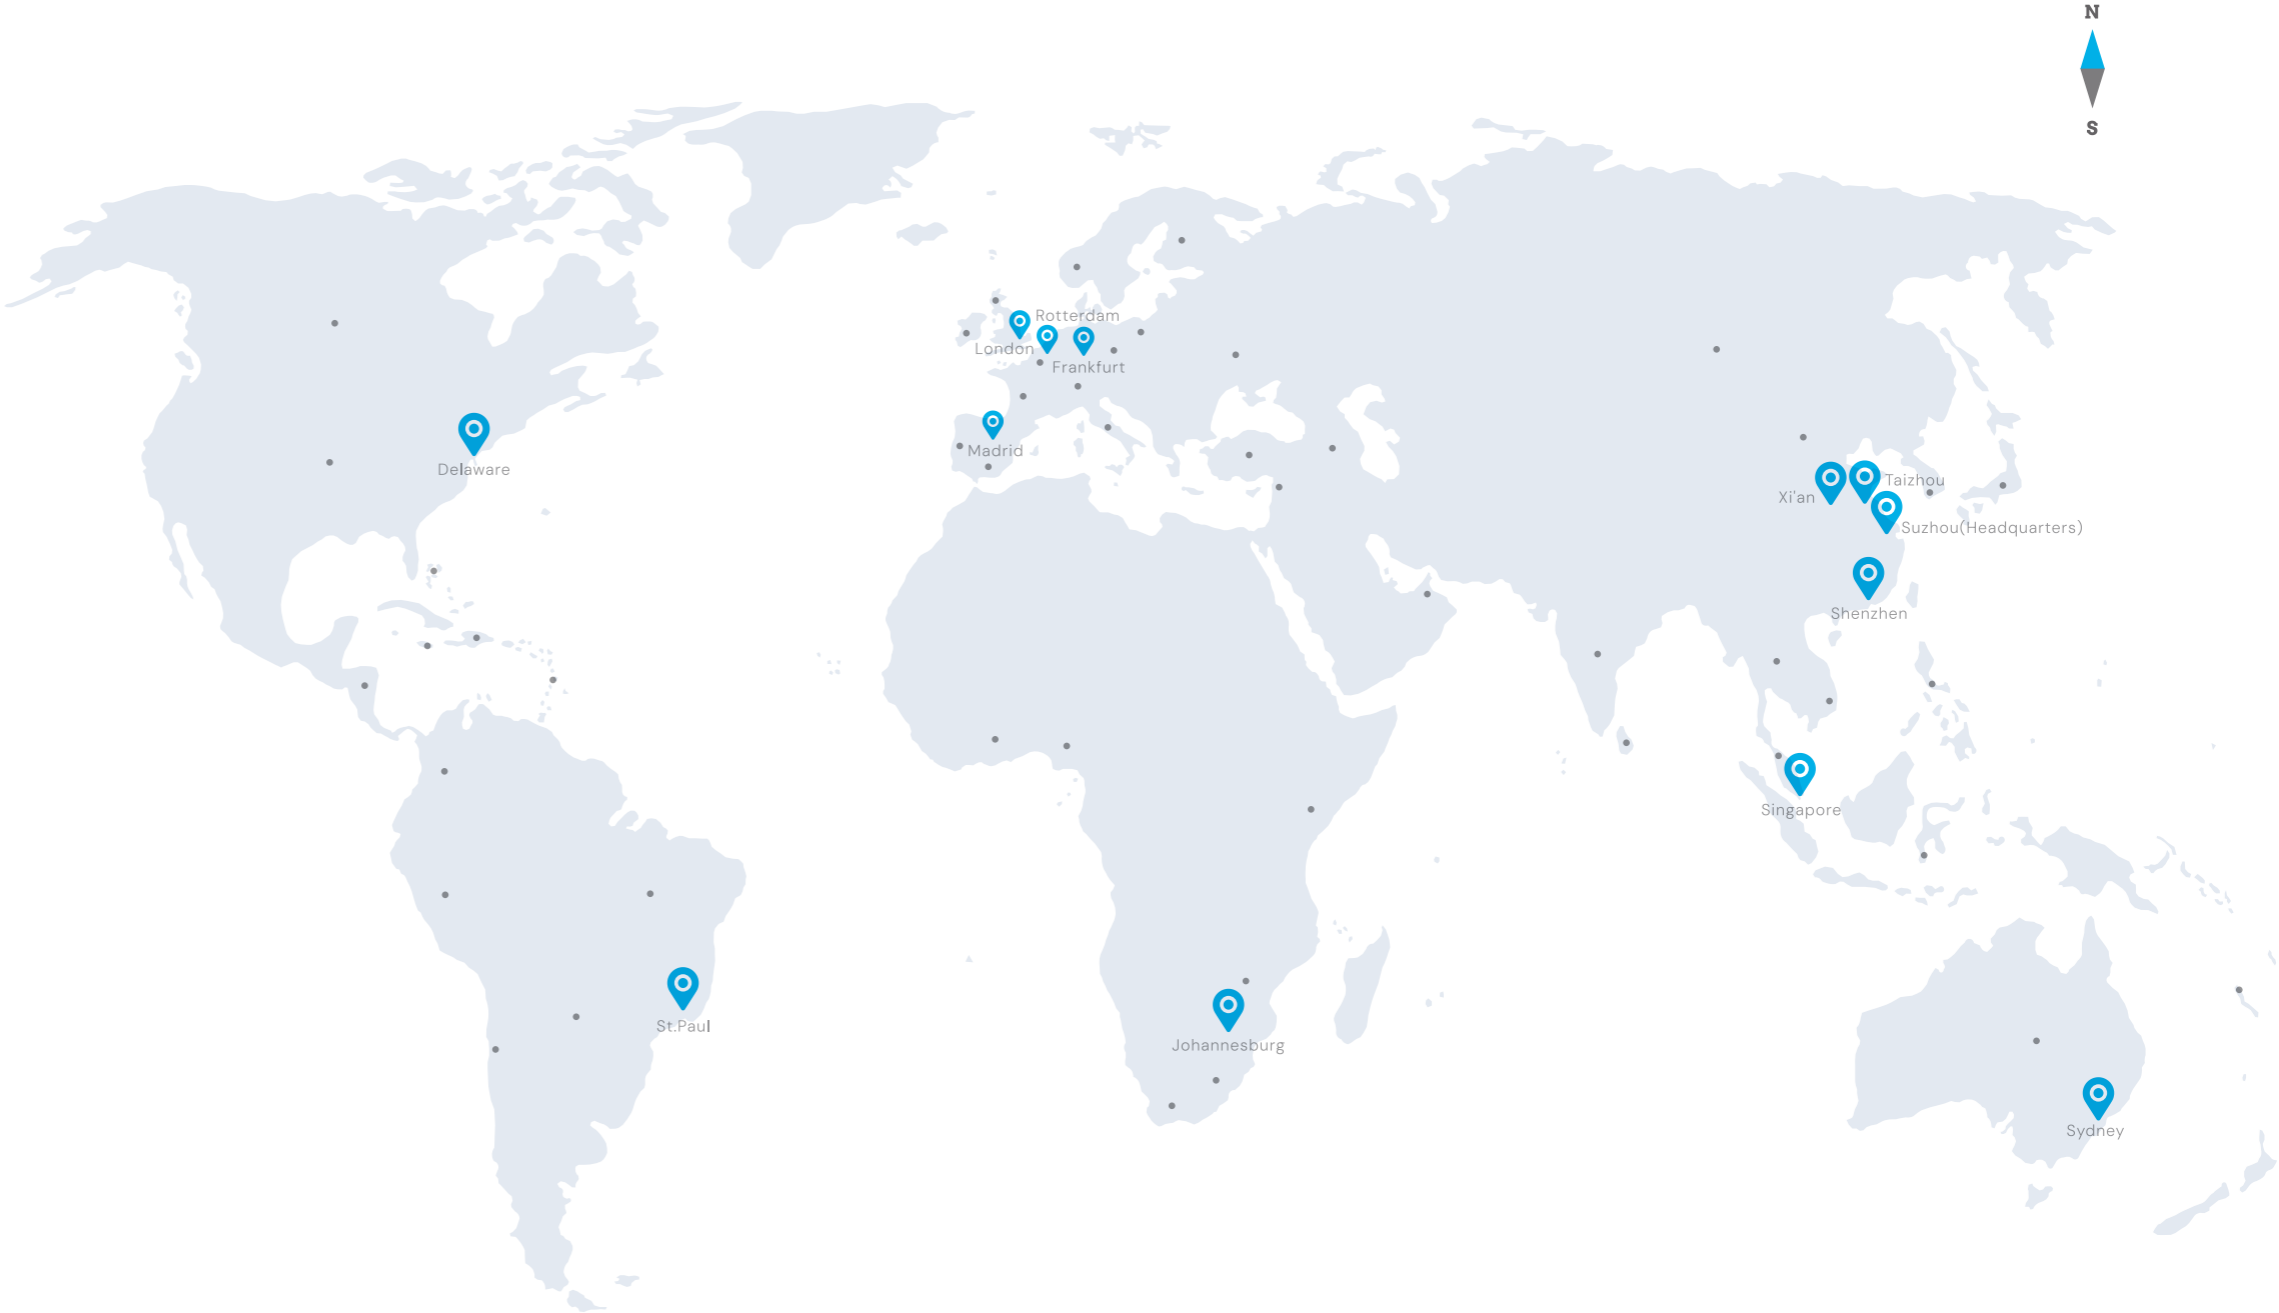

● Main Shipping Areas

📍 Branches

**13**

Global Branches

**2**

Production Centres

**2**

R&D Centres

**3GWh**

Annual Production Capacity

**100+**

Global Markets

**500,000**

Users

# Commercial and Industrial Energy Storage Products



All-in-one



Safe & Reliable



High Energy Density



All scenario



Intelligent O&M




# STACK100

Stack100 is suitable for residential and small commercial and industrial scenarios. Rackless and stackable design is easy to plug and play. It supports 12 clusters in parallel with a maximum capacity of 921kWh and supports 1C charge/discharge.



## Specification

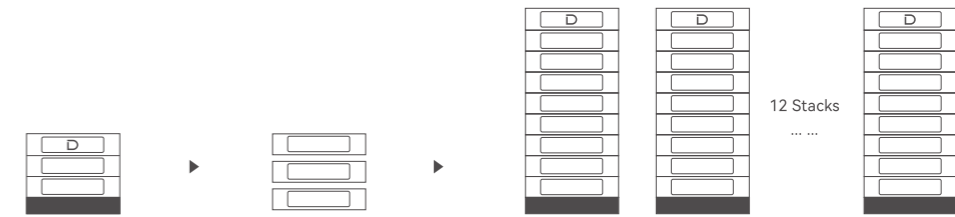

Model	STACK100
Battery Type	LiFePO <sub>4</sub>
Module Voltage/Capacity	51.2V/100Ah
Single Module Weight	47kg
System Modules Serial Number	3~15
System Energy Range	15.36~76.8kWh
Operating Voltage	134~864V
Recommended Charge/Discharge Current	50A (0.5C)
Max.Charge/Discharge Current	100A (1C)
Peak Discharge Current(2min 25°C)	125A(1.25C)
Depth of Discharge	95%
Communication	CAN/RS485
Cycle Life	Unlimited cycles / 10 Years
Max. Single Cluster Dimension[W*D*H]	591 / 390 / 1700mm~11 module
Charging Temp. Range	0~55°C
Discharging Temp. Range	-20~55°C
Protection Level	IP20
Fire Protection System	Aerosol fire extinguisher
Installation method	Stack type
Cooling method	Forced wind cooling
WiFi Module	Built-in WiFi module; APP OTA function
Certification & Safety Standard	CE-EMC/CE-RED/62619/63056/62477/62040/UN38.3
Compatible Inverters	Ingeteam/Solis/GoodWe/Growatt/Solplanet/SAJ/DEYE/Hoymiles/SOLINTEG ect.

\* Test conditions: 0.2C Charging& Discharging, @25°C, 95% DOD

## Features and Advantages

### Flexible Expansion

Up to 12 units in parallel,  
15KWh--921KWh capacity

### 1C Rate

Suitable for grid frequency regulation, charging stations and other scenarios, cost saving

### Long-term Reliability

LFP cells, 0 decay in 3 years, 10 years long warranty

### Ultra Safe

Intelligent fire extinguishing system, react within 5 seconds

### Easy Installation

0 wiring, rackless free stacking, plug-and-play, one cluster installation in 30min

### Module Mixing

Free mixing of modules within three years

# PowerRack HV4

PowerRack HV4 series features a rack-mount structure design that is ideal for medium-sized industrial and commercial applications. It supports up to 12 clusters of parallel machines with a maximum expansion capacity of 921 kWh. This effectively enhances PV consumption, provides backup power or peak shifting to ensure the safe and stable operation of the system.



## Features and Advantages

- Flexible Expansion**  
 Modular design, up to 12 units in parallel, 15KWh--921KWh capacity
- Economical**  
 Rack structure, lower cost, higher space utilization

- Long-term Reliability**  
 LFP cells, 10 years long warranty, intelligent BMS monitors battery status in real time
- Intelligent O&M**  
 Optional Wi-Fi module, real-time data monitoring and troubleshooting, one-key intelligent upgrade

## Specification

Model	HV51100
Battery Type	LiFePO <sub>4</sub>
Nominal Battery Energy	5.12kWh
Nominal Capacity	100Ah
Nominal Voltage	51.2V
Net Weight	43.5kg
Dimension(W/D/H)	481/535/140mm
Charging Temp. Range	0-55°C
Discharging Temp. Range	-20-55°C
Communication	CAN
Cycle Life *	>6000 Cycles
Protection Level	IP20
Expansion	Up to 15 units in series
Compatible Inverters	GoodWe/Solis/SAJ/Sinexcel/Hoymiles/Growatt/Ecatus/Sermatec/ATESS/Sunways etc.
Certification & Safety Standard	UN38.3/CE-EMC

\* Test conditions: 0.2C Charging/Discharging, @25°C, 95% DOD

Rack Type	PowerRack HV4		
Rack System Control unit Type	BDU100		
Battery Module Type	HV51100		
Battery Module Quantity	4~7 units	8~11 units	12~15 units
Nominal Battery Energy	5.12kWh×n(n=4~7)	5.12kWh×n(n=8~11)	5.12kWh×n(n=12~15)
Nominal Capacity	100Ah	100Ah	100Ah
Nominal Voltage	51.2V×n(n=4~7)	51.2V×n(n=8~11)	51.2V×n(n=12~15)
Nominal Power Output	3.07kW×n(n=4~7)	3.07kW×n(n=8~11)	3.07kW×n(n=12~15)
Max.Power Output	5.12kW×n(n=4~7)	5.12kW×n(n=8~11)	5.12kW×n(n=12~15)
Recommend Charging Current	50A	50A	50A
Recommend Discharging Current	50A	50A	50A
Net Weight	62+12+43.5kg×n(n=4~7)	86+12+43.5kg×n(n=8~11)	62×2+12+43.5kg×n(n=12~15)
Dimension(W/D/H)	601/610/1392mm	601/610/2012mm	601/610/1392mm*2(Two clusters)
Module Quantity and Configuration	4~7 Units in series	8~11 Units in series	12~15 Units in series

# BF100

BF100 is an outdoor-mountable DC battery cabinet featuring an intelligent air-cooled cooling design. It offers flexible single cabinet capacity of 71/86/100kWh, reserved DC side expansion interface. Additionally, it is equipped with a wall-mounted hybrid inverter to facilitate AC output. This cabinet is ideal for office parks, commercial buildings, charging stations, and other small industrial and commercial applications.



## Features and Advantages

### Flexible Expansion

Single cabinet capacity of 71/86/100kWh optional, reserve DC side expansion interface

### IP55+C3/C5

Resistance up to C3/C5 corrosion level, handles harsh environments such as high humidity and salt spray corrosion with ease.

### Simple O&M

Modular design, side outlet mode, easy to install, and easy to maintain.

### Safe & Reliable

Three-stage detection + active exhaust + passive explosion-proof design to eliminate hidden hazards and ensure safe operation.

## Specification

Model	BF100-C70	BF100-C80	BF100-C100
<b>Battery</b>			
Battery Type	LiFePO <sub>4</sub>		
Battery Capacity	280Ah		
Rated Current	140A		
Max. Current	160A		
PACK Configuration	1P16S		
PACK Quantity	5 PACK/Cluster	6 PACK/Cluster	7 PACK/Cluster
Voltage Range	232~288Vdc	278.4~345.6Vdc	324.8~403.2Vdc
Nominal Capacity	71kWh	86kWh	100kWh
<b>System</b>			
Weight	1100±100kg	1200±100kg	1300±100kg
Dimension (W/D/H)	725/1224/2258mm		
Max. Efficiency	≥94% (TBD)		
Air Conditioner Power	2kW (Cooling), 1kW (Heating)		
Temperature	-20~50°C (Derating above 45°C)		
Humidity	0~95%RH ( Non-condensing)		
Ingress Protection	IP55		
Anti-corrosion Grade	C3/C5		
Cooling Method	Air-cooling		
Noise	≤65dB (TBD)		
Display	Touch screen		
Elevation	3000m (Derating above 2000m)		
Fire Protection	Aerosol (Optional Perfluorohexanone)		
Communication	Ethernet/4G/RS485		
Certification	CE		

# DH100F

DH100F features an integrated multifunctional design that supports PV access and on-grid to off-grid switching. It encompasses the whole scenario of photovoltaic, storage and diesel generator. The single cabinet capacity of 71/86/100kWh optional, allowing for customization based on electricity consumption needs. This system is ideal for office parks, commercial buildings, charging stations, and other small industrial and commercial applications.



## Features and Advantages

### Flexible Expansion

Single cabinet capacity of 71/86/100kWh optional, supports both on-grid and off-grid AC parallel operation

### IP55 Protection

Fearless of outdoor installation, strong environmental adaptability

### Full-scenario

Supporting PV access, on-grid to off-grid switching, covering the whole scenario of photovoltaic, storage and diesel generator

### Safe & Reliable

Three-stage detection + active exhaust + passive explosion-proof design to eliminate hidden hazards and ensure safe operation

### Simple O&M

Modular design, rear outlet and lower outlet mode, easy to install, easy to layout, easy to maintain, and support for online monitoring and O&M

## Specification

Model	DH100F-C70	DH100F-C80	DH100F-C100
<b>Battery</b>			
Battery Type	LiFePO <sub>4</sub>		
Battery Capacity	280Ah		
Rated Current	140A		
Max. Current	160A		
PACK Configuration	1P16S		
PACK Quantity	5 PACK/Cluster	6 PACK/Cluster	7 PACK/Cluster
Voltage Range	232~288Vdc	278.4~345.6Vdc	324.8~403.2Vdc
Nominal Capacity	71kWh	86kWh	100kWh
<b>AC (On-grid)</b>			
Rated Power	35kW	40kW	50kW
AC Maximum Current	60A	74A	86A
AC Rated Voltage	400Vac		
Wiring Method	3P4L+PE		
Frequency	50Hz/60Hz		
Power Factor	0.8 (Leading)~0.8 (Lagging)		
THDi	< 5% (Rated power)		
<b>AC (Off-grid)</b>			
Rated Power	35kVA	40kVA	50kVA
AC Maximum Current	60A	74A	86A
AC Rated Voltage	400Vac		
Wiring Method	3P4L+PE		
Frequency	50Hz/60Hz		
Unbalanced Load	100%		
THDv	< 3% (Liner load)		
<b>Photovoltaic</b>			
Max. Input Power	25kW*2	30kW*2	35kW*2
Max. Input Current	80A*2		
Short-circuit Current	100A*2		
Max. Voltage	1000Vdc		
Input Voltage	300~1000Vdc	350~1000Vdc	400~1000Vdc
Start-up Voltage	375Vdc	440Vdc	500Vdc
MPPT Path	2		
<b>System</b>			
Weight	1500±100kg	1600±100kg	1700±100kg
Dimension (W/D/H)	1200/1224/2258mm		
Max. Efficiency	≥84% (TBD)		
Air Conditioner Power	2kW (Cooling), 1kW (Heating)		
Temperature	-20~50 °C (Derating above 45 °C)		
Humidity	0~95%RH (Non-condensing)		
Ingress protection	IP55		
Anti-corrosion Grade	C3		
Cooling Method	Air cooling		
Noise	≤70dB (TBD)		
Elevation	3000m (Derating above 2000m)		
Display	Touch screen		
Fire Protection	Aerosol (Optional Perfluorohexanone)		
Communication	Ethernet/4G/RS485		
Certification	CE, TUV		



# DH200F

The DH200F features an integrated multi-functional design that supports PV access, on-grid to off-grid switching, covering the whole scenario of photovoltaic, storage and diesel generator. It supports a maximum of 12 machines in AC parallel and can be expanded to 2.58MWh. Support equipped with intelligent and efficient STS, the switching time between on-grid and off-grid is less than 20 ms, ensuring a stable power supply.



## Features and Advantages

### Flexible Expansion

Maximum support for 12 machines in AC parallel, expandable to 2.58MWh; reserved DC expansion interface.

### No Black Out

Equipped with intelligent and efficient STS, the off-grid switching time is less than 20 ms (optional).

### Safe & Reliable

A prevention-oriented fire protection strategy featuring three levels of detection, multiple extinguishing agents, and EMS intelligent judgment.

### Structural Innovation

The unique air duct design features a shoulder-to-shoulder flexible layout, resulting in high space utilization.

### IP55 Protection

Resistant to outdoor installation with strong environmental adaptability.

### Full-scenario

Supporting PV access, transitioning from on-grid to off-grid, and encompassing the entire spectrum of photovoltaic systems, energy storage, and diesel generators.

## Specification

Model	DH200F
<b>Battery</b>	
Battery Type	LiFePO <sub>4</sub>
Battery Capacity	280Ah
PACK Configuration	1P16S
PACK Quantity	15 PACK/Cluster
Rated Current	140A
Max. Current	160A
Voltage Range	672~864Vdc
Nominal Capacity	215kWh
<b>AC (On-grid)</b>	
Rated Power	100kW
AC Maximum Current	167A
AC Rated Voltage	400Vac
Wiring Method	3P4L+PE
Frequency	50Hz/60Hz
Power Factor	1(Leading)~1(Lagging)
THDi	≤3% (Rated power)
Max. Number Of Parallel Expansions	12
<b>AC(Off-grid)</b>	
Rated Power	100kW
AC Rated Voltage	400Vac
AC Maximum Current	167A
Wiring method	3P4L+PE
Frequency	50Hz/60Hz
Unbalanced Load	100%
THDv	< 3% (Liner load)
Max. Number Of Parallel Expansions	5
<b>Photovoltaic</b>	
Max. Input Power	50kW (Power 1.1 times overload)
Max. Input Current	100A
Short-circuit Current	150A
Max. Voltage	670Vdc
Input Voltage	200-670Vdc
Start-up Voltage	250Vdc
MPPT Path	0~3
<b>System</b>	
Weight	2800±100kg
Dimension (W/D/H)	1850/1265/2250mm
Max. Efficiency	≥87% (TBD)
Air Conditioner Power	3kW (Cooling), 1kW (Heating)
Temperature	-20~50°C(Derating above 40°C)
Humidity	0~95%RH (Non-condensing)
Ingress protection	IP55
Anti-corrosion Grade	C3
Cooling method	Air cooling
Noise	≤75dB
Elevation	3000m (Derating above 2000m)
Display	Touch screen
Fire Protection	Aerosol (Optional Perfluorohexanone)
Communication	Ethernet/4G/RS485
Certification	CQC, CE, TUV

# DH200Y

DH200Y is the first high-security, high-energy density, DC1000V liquid-cooled all-in-one energy storage system designed for grid-connected projects, including office parks, commercial buildings, and charging stations. Single cabinet capacity of 232kWh, maximum support for 10 machines in parallel, expandable to 2.3MWh. With a 9% increase in energy density and a 10% reduction in floor space. The higher energy density provides superior options for energy storage solutions.



## Features and Advantages

### Flexible Expansion

Maximum support for 10 machines in AC parallel, expandable to 2.3MWh; reserved DC expansion interface.

### Ultra Safe

Triple-level fire suppression + active exhaust + passive explosion-proof design to eliminate hidden hazards and ensure safe operation.

### Ultra-high Level Protection

PACK+PCS IP65, C3/C5 Anti-corrosion grade optional, handles harsh environments such as high humidity and salt spray corrosion with ease.

### Economical

Occupies an area of 1.58m<sup>2</sup>, energy density up to 147kWh/m<sup>2</sup>, low installation costs

### Smart Temperature Control

PACK smart liquid cooling+PCS smart Air cooling, cluster-level temperature difference  $\leq 3^{\circ}\text{C}$

### Simple O&M

Modular design, pre-maintenance solution for easy access and O&M, and support for online monitoring and O&M

## Specification

Model	DH200Y
<b>Battery</b>	
Battery Type	LiFePO <sub>4</sub>
Battery Capacity	280Ah
PACK Configuration	1P52S
PACK Quantity	5 PACK/Cluster
Rated Current	140A
Max. Current	160A
Voltage Range	754~936Vdc
Nominal Capacity	232kWh
<b>AC (On-grid)</b>	
Rated Power	100kW
AC Maximum Current	145A
AC Rated Voltage	400Vac
Wiring Method	3P4L+PE
Frequency	50Hz
Power Factor	1(Leading)~1(Lagging)
THDi	$\leq 3\%$ (Rated power)
Max. Number Of Parallel Expansions	10
<b>System</b>	
Weight	2600±100kg
Dimension (W/D/H)	1055/1645/2398mm
Max. Efficiency	$\geq 90\%$ (TBD)
Liquid-cooling Power	2.5kW (Cooling), 2kW (Heating)
Temperature	-20~50°C (Derating above 45°C)
Humidity	0~95%RH (Non-condensing)
Ingress Protection	IP55
Anti-corrosion Grade	C3/C5
Cooling Method	PACK Liquid-cooling + PCS Air-cooling
Noise	$\leq 75\text{dB}$
Elevation	3000m (Derating above 2000m)
Display	Touch screen
Fire Protection	Aerosol (Optional Perfluorohexanone)
Communication	Ethernet/4G/RS485
Certification	CQC, CE, TUV

# BY5000

BY5000 is the first 20-foot, 5 MWh liquid-cooled energy storage system. It features a 375Ah large battery cell, a double-layer liquid-cooled PACK structural design, and a single cluster with a management string design. This system is easy to transport and install, offering customers a more efficient, safer, and smarter all-encompassing energy storage solution.



## Features and Advantages

### Flexible Expansion

Support DC side expansion, meet the capacity requirements of various scenarios.

### Long Lifetime

Double-layer liquid-cooled battery cell PACK structure design, intelligent temperature control.

### Minimal O&M

Modular&non-walk-in design, battery pre-assembly, easy to install, easy to deploy, easy to maintain.

### Ultra Safe

Three-stage fire protection +active pressure release+explosion proof; three-stage fuse, real-time insulation check.

### IP55+C5

Ultra-high level protection, handles harsh environments such as high humidity and salt spray corrosion with ease.

## Specification

Model	BY5000
Battery	
Battery Type	LiFePO4
Battery Capacity	375Ah
Rated Current	1880A
Max. Current	2120A
PACK Configuration	1P6OS
PACK Quantity	7 PACK*10 Cluster
Voltage Range	1176-1500Vdc
Nominal Capacity	5.04MWh
System	
Weight	43t (TBD)
Dimension (W/D/H)	6058/2438/3400mm (TBD)
Max. Efficiency	≥93% (TBD)
Liquid-cooling Power	60kW (Cooling) (TBD)
Temperature	-20~50°C (Derating above 45°C)
Humidity	0~95%RH (Non-condensing)
Ingress Protection	IP55
Anti-Corrosion Grade	C5
Cooling Method	Liquid-cooling
Elevation	3000m (Derating above 2000m)
Display	Touch screen
Fire Protection	PACK/System/Water fire protection/Ventilation & Explosion protection system
Communication Protocol	4G, Modbus RTU, Modbus TCP/IP
Standards-compliant	GB/T36276, GB/T34131, IEC62619, IEC63056, IEC60730, EN61000-6-2/4, IEC 62933, UL9540A

## Application Cases

---

---

Dyness has provided safe, reliable, and high-quality products and services to over 500,000+ users



# C&L Application Cases




• **Netherlands** 100kW/215kWh  
DH200F Dynamic Capacity Expansion + PV Consumption



• **Brazil** 100kW/307kWh  
PowerRack HV4 Dynamic Capacity Expansion + PV Consumption



• **Bulgaria** 112.64 kWh  
PowerRack HV4F Peak-to-valley Arbitrage+Self-generation and Self-use

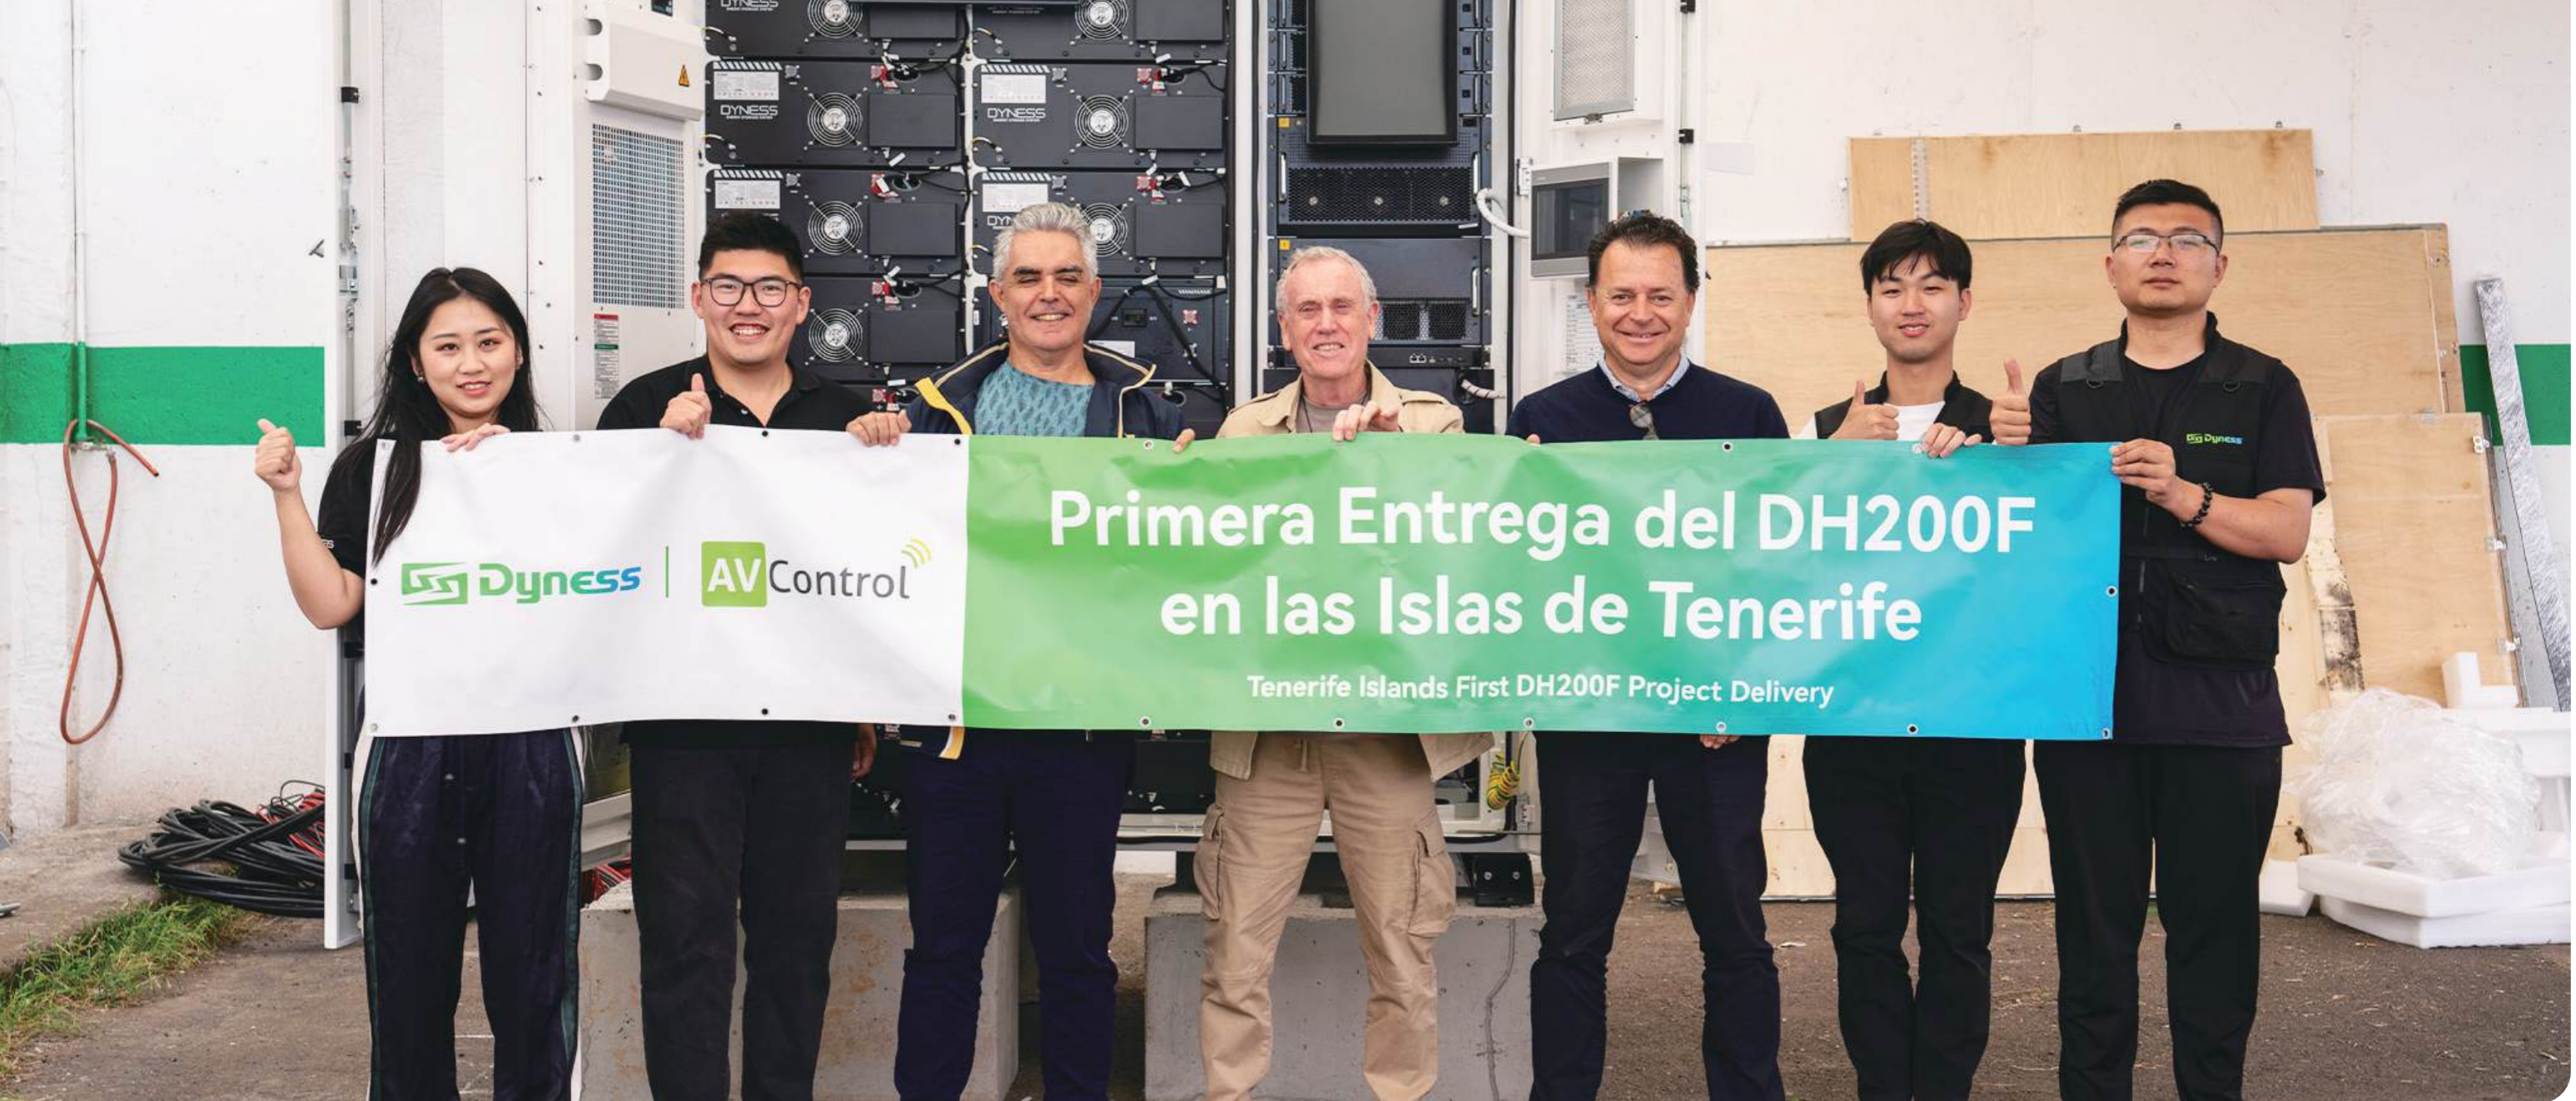

- **Spain** 100kW/215kWh  
DH200F Emergency Power Supply + PV Consumption



- **Netherlands** 300kW/645kWh  
DH200F Dynamic Capacity Expansion + PV Consumption+Charging Pile

- **Spain** 500kW/1160kWh  
DH200Y Self-generation and Self-use+PV Consumption



- **China** 5MW/18MWh  
DH200F Peak-shaving+PV Consumption



- **China** 100kW/215kWh  
DH200F Peak-to-valley Arbitrage + Dynamic Capacity Increase

# After-sales Service

Online + offline comprehensive operation and maintenance service system

+86 400 666 0655



## Offline

8 Supporting Languages  
13 Service Center  
Worldwide Service Locations



## Online

Sophisticated Online Service Platform  
200+ Online Service Engineer  
<https://support.dyness.com>



## Professional

Localized technical support and customized service solutions.



## Efficient

After-sales service response time is less than 1 hour.



## Responsible

Customer centricity and 98% customer satisfaction

